


KONKİLİT YILDIZ KAPLIN KATALOĞU

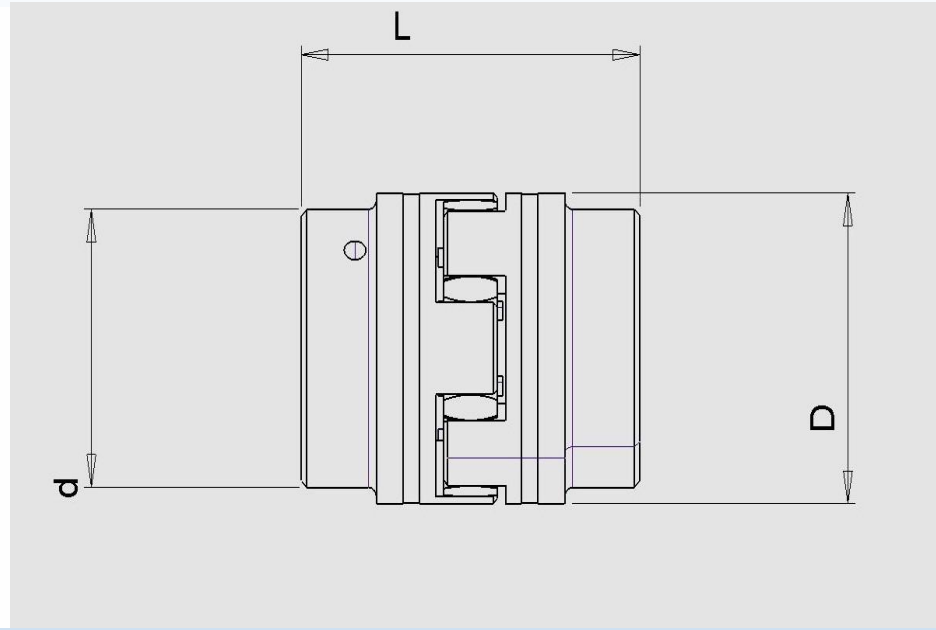

NUMARALAR	98 SHORE PÜ SÖNÜMLEYİCİ TORK DEĞERLERİ (Nm)	<i>D</i>	<i>d</i>	<i>L</i>	<i>Min-max mil çapları</i>	<i>Max rpm Dönüş hızı</i>
14	12,5	32	30	35	0-16	19000
19	17	40	32	66	0-24	15000
24	60	56	40	78	0-28	12000
28	160	66	48	90	0-38	10000
38	325	80	66	114	12-40	7500
42	450	95	75	126	14-45	6700
48	525	105	85	140	15-52	6000
55	685	120	98	160	20-60	5000
65	940	135	115	185	22-70	4200

75	1920	160	135	210	30-80	3600
90	3600	200	160	245	40-100	3000
100	4950	225	180	270	50-115	2500
110	7200	255	200	295	60-125	2200
125	10000	290	230	340	60-145	1900
140	12800	320	255	375	60-160	1600
160	19200	370	290	425	80-185	1400
180	28000	420	325	475	85-200	1200

Vasıflı CK45 dövme çelikten üretilmiştir.

İsteğe bağlı kama ve konik kilit bağlantısı seçilebilir.

www.konkilit.com.tr

info@konkilit.com.tr