


KONKİLİT DİŞLİ KAPLİN KATALOĞU (KDK)

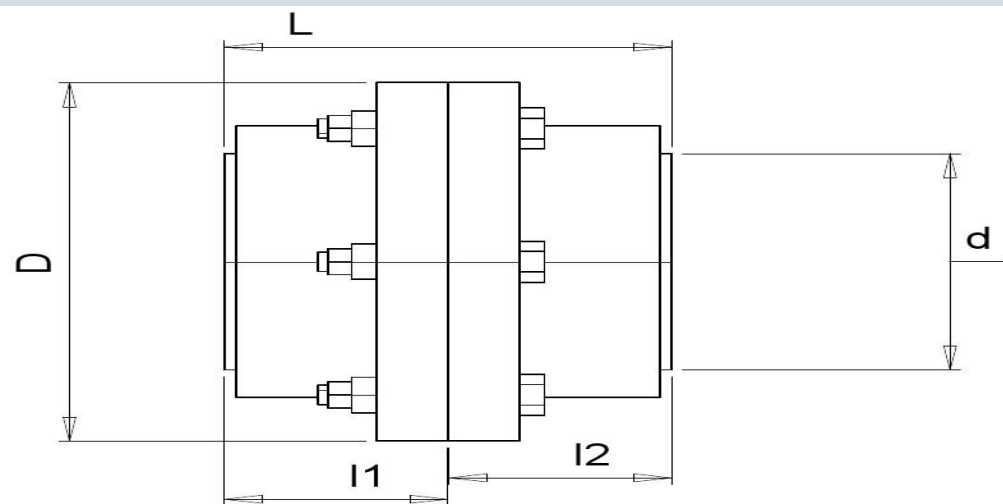

KDK	PİLOT DELİK ÇAPI (mm)	Max Delik Çapı d	Gövde çapı D	l1,l2	uzunluk L	MİN-MAX TORK DEĞERLERİ	Max dönüş hızı (rpm)
1	26	50	112	44	91	930-1580	8500
2	26	65	143	51	105	2000-3300	6400
3	31	82	175	63	129	3500-6300	5400
4	38	100	214	77	159	6500-11000	4500
5	44,5	115	241	91	187	10000-17400	4000
6	46	135	281	106	218	17000-28800	3500
7	52	160	319	121	248	28500-48500	3100
8	80	175	348	136	280	37000-62000	3000
9	80	195	391	151	310	51000-86000	2500
10	90	215	427	176	360	65000-110000	2300
11	100	240	457	191	390	85000-145000	2100
12	100	285	528	221	452	135000-240000	1850

*KDK dişli kaplin 7225 kalite çelikten imal edilip , dişliler 50-55 HRC sertleştirme uygulanmıştır.